




ASUS T300LA-US51T SSD replacement

Teardown to access the SSD.

Written By: Sasa Macura

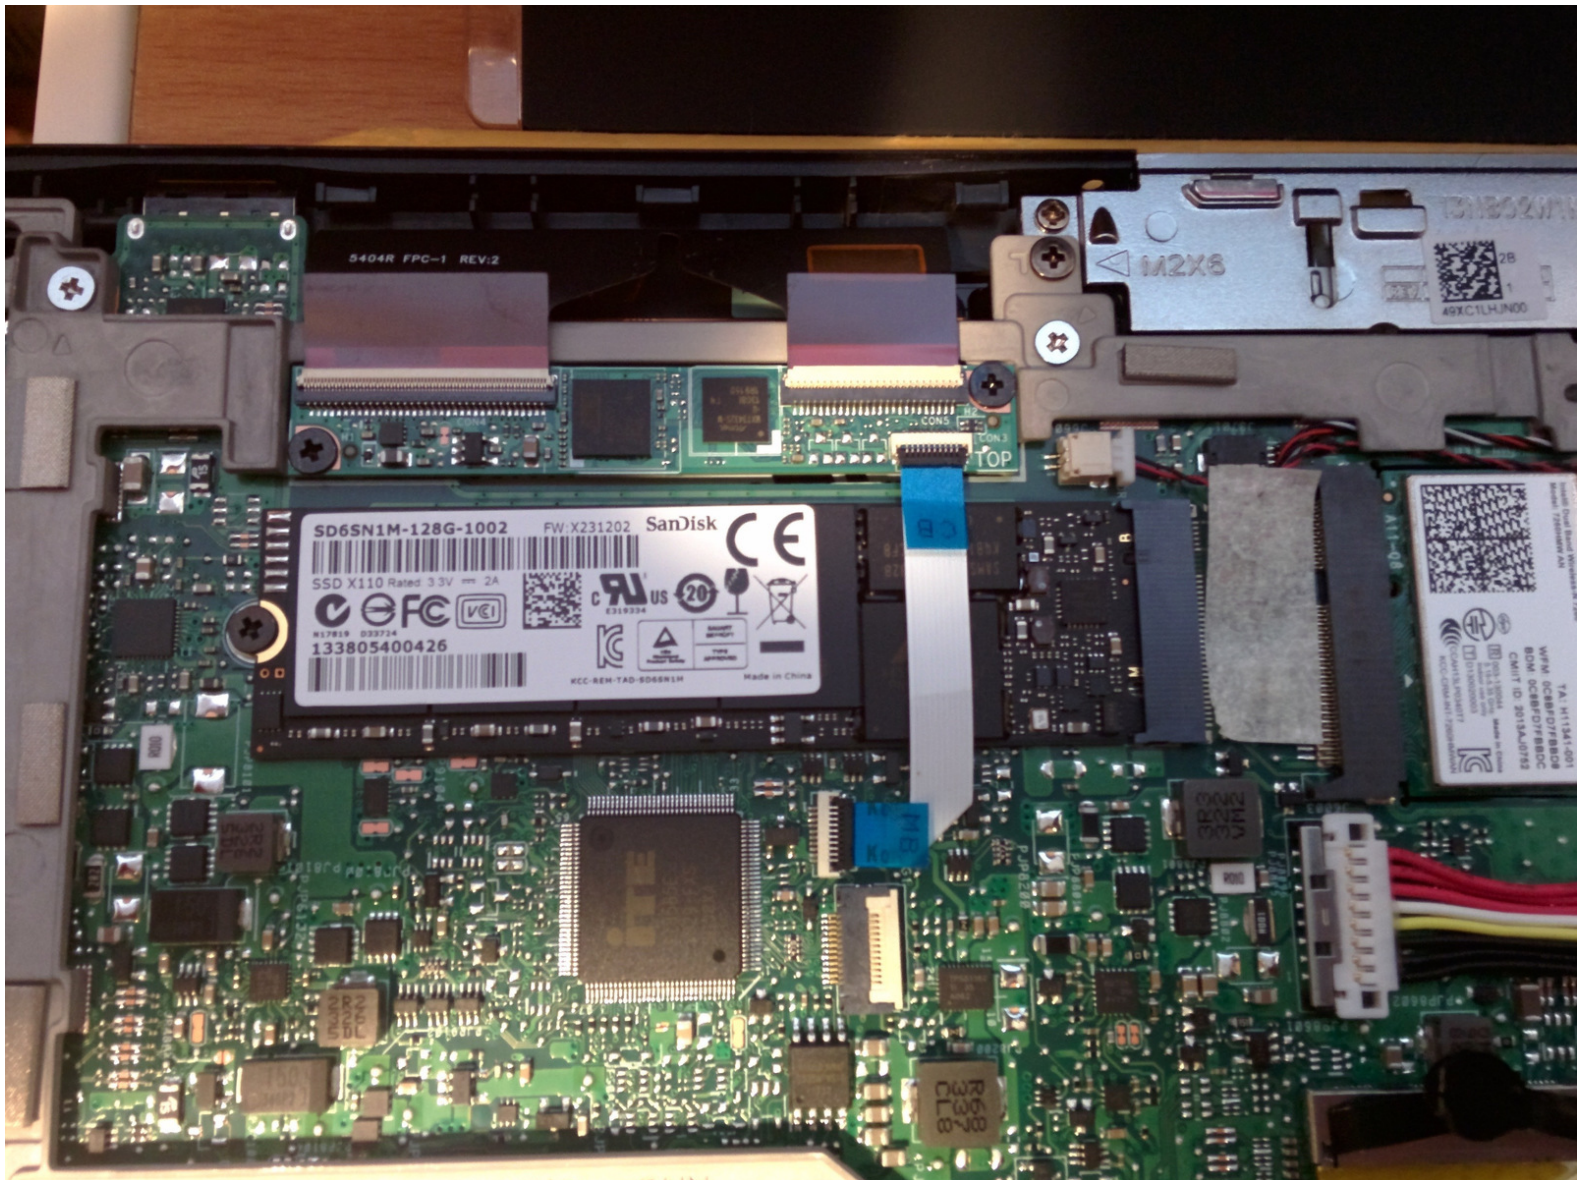

INTRODUCTION

Replacement of the SSD.



TOOLS:


- [iFixit Opening Tools](#) (1)
-

Step 1 — SSD




Use a plastic pry tool to pop the back of the tablet off. Be careful the aluminum back is attached via plastic hooks.

Step 2

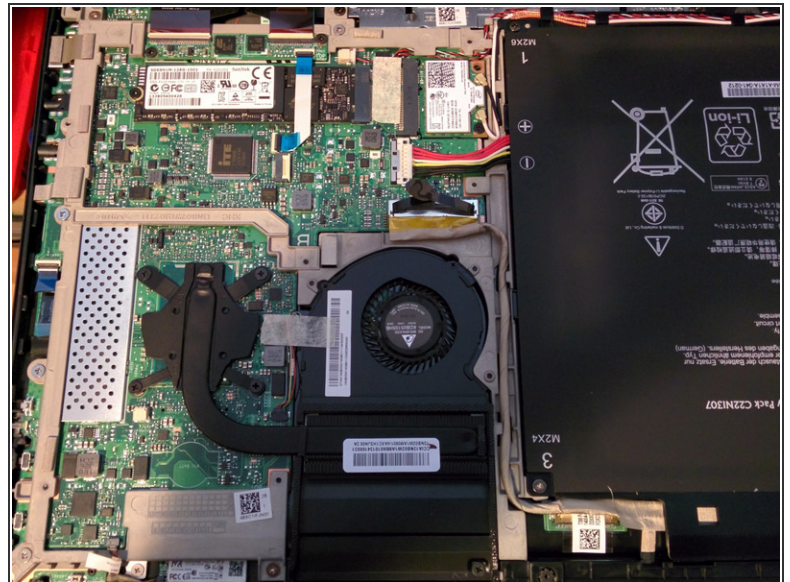

- The battery is attached via 6 screws. They are clearly marked with location and screw size.

Step 3

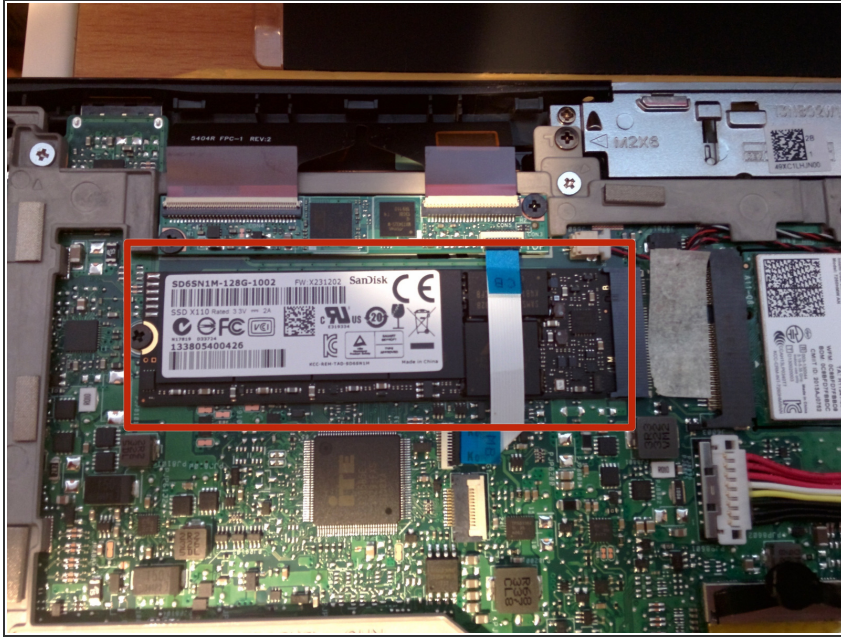

- The SSD is a M.2 NGFF style with a size of 80mm. The label states 3.3v 2A. If replaced with a lower power drive battery life might increase.
- Unscrew the single screw on the end of the drive. Undo the tabs on the ribbon cable above it and take the ribbon out.
- Remove the drive and replace with a larger new one.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-13 01:03:01 PM.